


BIOJACK[®]

HARVESTER HEADS BIOJACK 300 HARVESTER



*Fast and affordable
Delimbed energy wood
The best in first thinning*

<< 3,2 m/sec >>

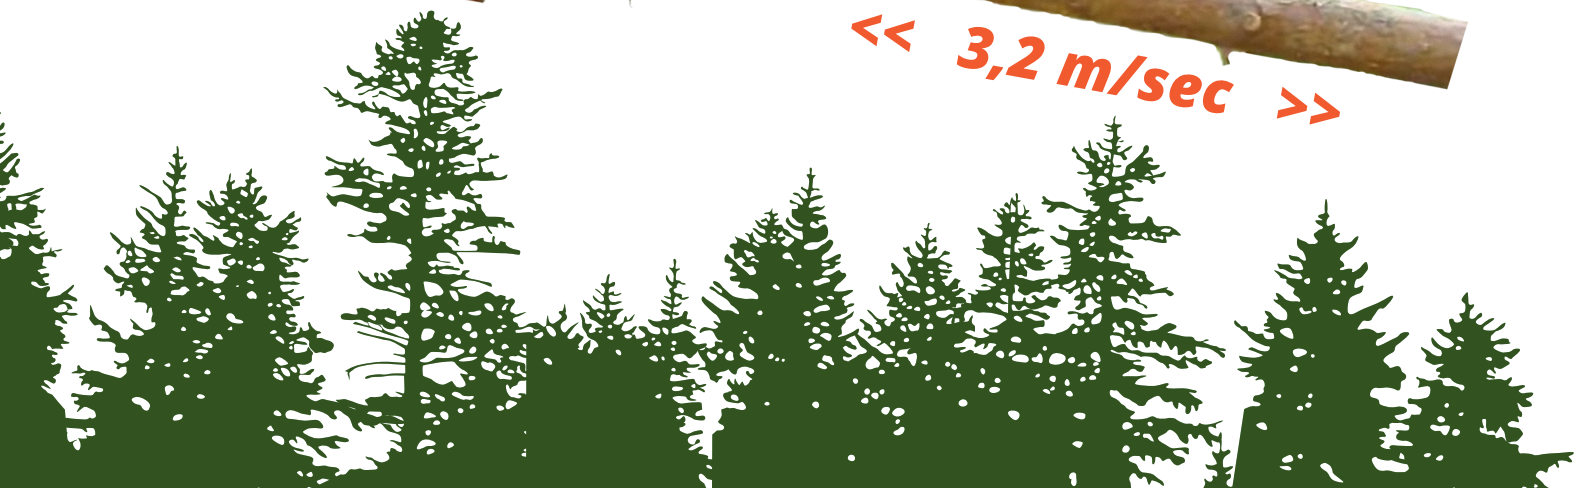

MADE IN FINLAND

BIOJACK 300H



Standard Option **LOGGER®** length measure
LOGGER® volume data control

TECHNICAL DATA

- Weight (with 5 cc saw motor) 250 kg
- Weight (with Hultdins SC100) 300 kg
- Cut diameter max 300 mm
- Cut diameter optimal 60-220 mm
- Grapple opening 775 mm
- Oil flow (with 5 cc saw motor) 60-70 L/min
- Oil flow (with Hultdins SC100) 80-100 L/min
- Working pressure range 190-220 bar (total pressure – back pressure).
- Back pressure max 20-30 bar
- Pressure and return line min 3/4"
- Free return line for saw motor 3/8"
- Electric connection: 24 V CAN bus (15 m)
- Base machines: tractor, excavator (< 9 t)

When you want to do more
than just cutting wood

The Biojack 300 Harvester head has a light and tough structure, designed for demanding use and durability. The delimbing is assured by feed rollers and 3 delimbing blades. Follow the production in the cabin with the **LOGGER®** display controller from Technion. Professionals will appreciate the Hultdins SuperCut 100 saw unit for intensive work.

Biojack products are durable and sturdy, manufactured by Nummek in Finland, from top quality materials. All our products are user-friendly, easy and fast to use instinctively, and can be customized according to your needs, so you can simply focus on your work.

